





MC4-1.5k-PV CONNECTOR



MC4-1.5k-PV-N

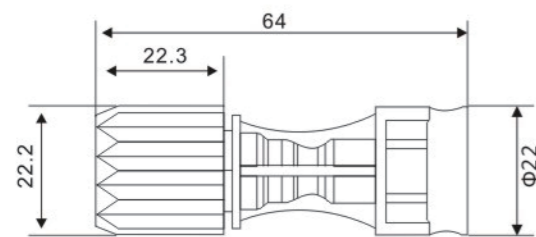

MC4-1.5k-PV-P



Technical parameter			
Rated current	30A	Degree of protection	IP2*/IP67
Rated voltage	1500V DC	Flame class	UL94-VO
Test voltage	6000V(50Hz,1min)	Safety class	II
Overvoltage category/Pollution degree	CATIII/2	Suitable cable	2.5mm ² ~6mm ² /14AWG~10AWG
Contact resistance of plug connectors	≤5mΩ	Insertion force/Withdrawal force	≤50N
Contact material	Copper,Ag plated	Connecting System	≤50N
Insulation material	PPO	Temperature range	-40°C~+85°C




MC4-1.5k-CB CONNECTOR



MC4-1.5k-CB-N



MC4-1.5k-CB-P

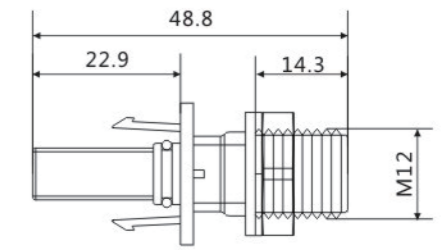

Technical parameter			
Rated current	30A	Degree of protection	IP2*/IP67
Rated voltage	1500V DC	Flame class	UL94-VO
Test voltage	6000V(50Hz,1min)	Safety class	II
Overvoltage category/Pollution degree	CATIII/2	Suitable cable	2.5mm ² ~6mm ² /14AWG~10AWG
Contact resistance of plug connectors	≤5mΩ	Insertion force/Withdrawal force	≤50N
Contact material	Copper,Ag plated	Connecting System	≤50N
Insulation material	PPO	Temperature range	-40°C~+85°C